


Q DECO

Product Characteristics

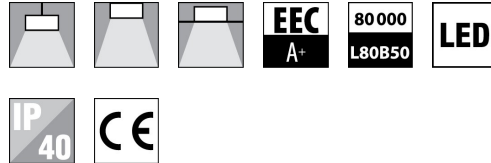

Beskrivning

Q DECO SKY creates a realistic picture of the sky on a room ceiling. It combines lighting and decoration in one, creating a positive atmosphere in any interior.

The effect of the skylight in the room creates a feeling of openness and space.

Decorative panels Q DECO SKY are derived from standard fixtures Q and QP, so they have the same dimensions, mounting way and electrical equipment (used LEDs and drivers). Due used decors is the light output of the panels reduced by 30-50% compared with the corresponding variant Q or QP.

Lamp type: LED
 Rated life time L80/B50 (h): 80000
 Color rendering index CRI: 80-89
 Type of dimming: 1-10 V, DALI, Not dimmable
 Protection class: I, II
 Degree of protection (IP): IP20, IP40
 Nominal voltage (V): 220...240
 Mounting method: Surface mounting, Built-in, Pendant
 Body material: Eloxal aluminium frame

Ljusfördelning

Art	W	Lumen	lm/W	Panel / motive	IP	Kg
1228	36	3900	108	6 x 596*596 mm	40	4.5

Art	W	Lumen	lm/W	Panel / motive	IP	Kg
1229	36	3900	108	6 x 596*596 mm	40	4.5
1230	36	3900	108	6 x 596*596 mm	40	4.5
1231	36	3900	108	6 x 596*596 mm	40	4.5
1232	36	3900	108	6 x 596*596 mm	40	4.5
1233	36	3900	108	12 x 596*596 mm	40	4.5
1234	36	3900	108	6 x 596*596 mm	40	4.5
1235	36	3900	108	6 x 596*596 mm	40	4.5
1236	36	3900	108	6 x 596*596 mm	40	4.5
1237	36	3900	108	6 x 596*596 mm	40	4.5
1238	36	3900	108	6 x 596*596 mm	40	4.5
1239	36	3900	108	12 x 596*596 mm	40	4.5
1240	36	3900	108	6 x 596*596 mm	40	4.5
1241	36	3900	108	9 x 596*596 mm	40	4.5
1242	36	3900	108	12 x 596*596 mm	40	4.5
1243	36	3900	108	12 x 596*596 mm	40	4.5
1244	36	3900	108	6 x 596*596 mm	40	4.5
1245	36	3900	108	6 x 596*596 mm	40	4.5
1246	36	3900	108	6 x 596*596 mm	40	4.5
1247	36	3900	108	6 x 596*596 mm	40	4.5
1248	36	3900	108	6 x 596*596 mm	40	4.5
1249	36	3900	108	6 x 596*596 mm	40	4.5
1250	36	3900	108	6 x 596*596 mm	40	4.5
1251	36	3900	108	6 x 596*596 mm	40	4.5
1252	36	3900	108	6 x 596*596 mm	40	4.5
1253	36	3900	108	6 x 596*596 mm	40	4.5
1254	36	3900	108	10 x 596*596 mm	40	4.5
1255	36	3900	108	4 x 596*596 mm	40	4.5
1256	36	3900	108	4 x 596*596 mm	40	4.5
1257	36	3900	108	8 x 596*596 mm	40	4.5
1258	36	3900	108	4 x 596*596 mm	40	4.5
1259	36	3900	108	4 x 596*596 mm	40	4.5
1260	36	3900	108	3 x 596*596 mm	40	4.5