



Electrical Information							
Model No.	WP06-015	WP06-025	WP06-035	WP06-045	WP06-060		
Power Consumption(±5%)	15W	25W	35W	45W	60W		
Power Supply	LiFud			SOSEN			
Input Voltage	220-240 VAC , 50 / 60 Hz						
Power Factor	>0.9						
Surge Protection	6kV line-line, 10kV line-earth						
Driver Type	Constant Current (CC)						
Control	Dimmable and Non-dimmable, Photocell Control						

Optic Information					
LED Type	SMD 2835				
Luminous Flux (±10%)	1800LM	3000LM	4200LM	5400LM	7200LM
Efficacy(4000K Ra70)	120lm/W				
Correlated Color Temperature	4000K (3000K,5000K optional)				
Color Rendering Index	Ra80 (Ra70 optional)				
Beam Angle	U00C04				
UGR level	NA				

Description

TUPEX ROBO WP06 slim wall pack is designed for areas like outdoor lighting and courtyard illumination, which can increase security in outdoor common areas and enhance building exteriors by brightening doorways and pedestrian walkways.

Key Features

- Contemporary, architectural design, elegant appearance.
- Smooth housing .
- Professional optic provide an excellent effect, managing glare while provides high level of visibility.
- IK08, IP66 Rated

Dimensions and Mount

Product Dimension	293*289*97mm	
Luminaire Net Weight	2.0±0.3KG	2.3±0.3KG
Export Carton Size	360*360*150mm	
Gross Weight	2.4±0.3KG	2.7±0.3KG
Mounting Option	Wall Mounting	
Material	Aluminum Alloy	
	Polycarbonate Optical Lens	
Finish	Powder Coating	
Fixture Color	Silvery Black	
EPA	1.09ft²	
IK Rating	IK08	
IP Rating	IP66	

Lifespan and Warranty

Operating Temperature	-30°C to +50°C
	54000hrs-L90
Life Time of LED @Ta=25°C	100000hrs-L80
	100000hrs-L70
Warranty	5 Years

Applications


- Building exteriors
- Courtyard

New Features

* Please consult us for details.


Comming Soon

Mounting Options

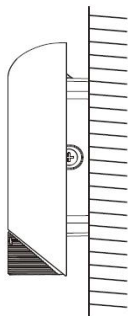

Wall Mounting

Dimensions

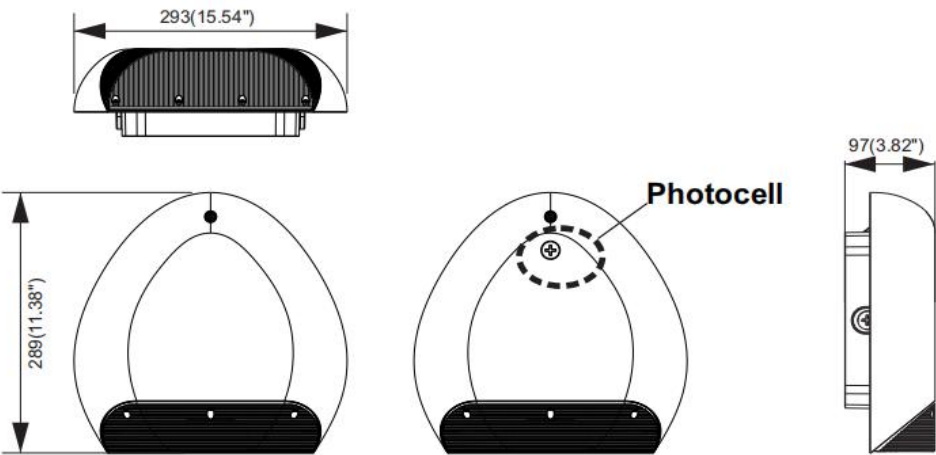

Accessories



Photocell Control
ANSI C136.41-2013 Dimming
Receptacles



Photocell Control
ANSI C136.41-2013 Dimming
Receptacles