

TUPex<sup>electric</sup>



**TUPEX**

| Functional and Robust LED Wall Light



## WHY TUPEX ROBO LED?

Wall-mounted luminaire LED with asymmetrical light spread and broad light emission. Fits in most outdoor environments.

1. industrial facades
2. larger buildings
3. outdoor corridors
4. garages
5. stairs
6. paths
7. other outdoor environments.



# FEATURES

TUPex<sup>electric</sup>

140lm/W



15W/ 25W/ 35W/ 45W/55W



IP66



IK10



Ta-30+50

- Delicate and sturdy design
- 5 different lumen packages from 2100lm to 7700lm
- Emergency battery for security lighting
- CCT selectable supports flexible project solutions
- Back side and side work wiring are available
- Pre-reversed holes for quick installation
- Ambient operating temperature up to 50°C
- Compatible with Photocell



# PARAMETERS

Model	WP06-15	WP06-25	WP06-35	WP06-45	WP06-55
Power	15W	25W	35W	45W	55W
Body Color	RAL9005				
Lumen efficiency	140lm/W (4000K Ra80)				
CCT	3000K/4000K/5000K				
Optic	U00C04				
Input Voltage (Driver)	220-240VAC , 50/60Hz				
Protection	IP66 /IK10				
LED	SMD2835				
Mounting	WALL MOUNT				
Controls	1-10V,DALI,Photocell				
Ta.	-30℃~+50℃ (Emergency version 0°~+40℃)				
Net Weight	2.3±0.3kg				
Demention	293*289*97mm				



## ADVANTAGES

**01**

CCT  
ADJUSTABLE

**02**

DAYLIGHT  
HVESTING


**03**

EMERGENCY  
BATTERY

# CCT-SELECTABLE IN 3000K 4000K 5000K



- CCT-selectable help to create flexible inventory
- Switchable on site for projects demands

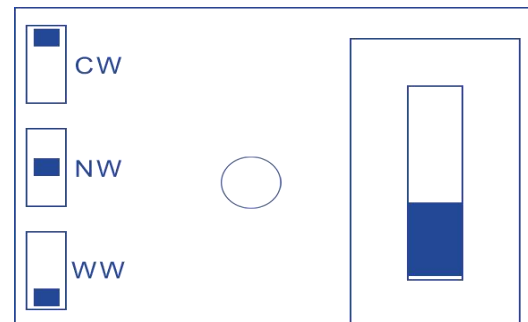

- Choose preferred CCT easily in three steps (Push Up--on Middle--Push Down)

# EMERGENCY FUNCTION

Built-in battery for emergency. Emergency function provides safety and effective lighting environment for residential or industrial application

Model	Emergency Power	Emergency Time
15W/25W/35W/45W/55W	2W	3hrs (180m')





# PHOTOCELL



Code: JL-403C  
100-240VAC input



Power Off




Power On



Photocell can awake up wall light automatically by detecting ambient lux level ,and turn off as requirements.



# OPTIC ADVANTAGE

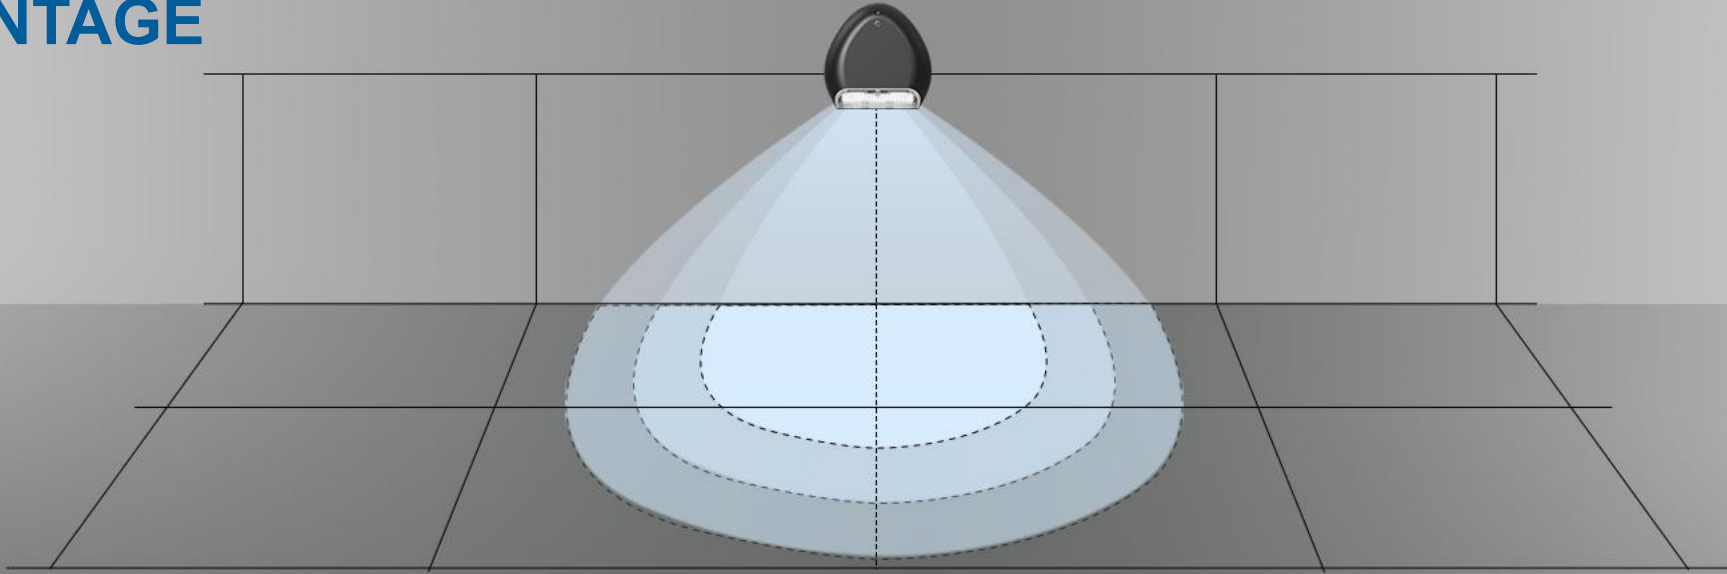

- Wallpack is suitable for use in a wide range of environmental zones where control of nuisance glare is critical .
- ROBO comes with a diffuser optic design to delivery non-dazzling lighting distribution, to approaching maximise spacings between luminaires whilst minimising light pollution

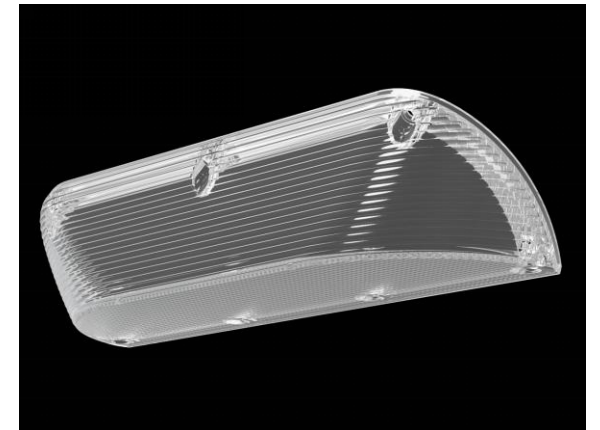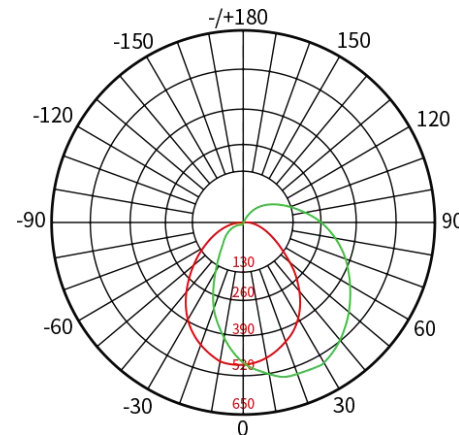

Anti-glare PC diffuser






**CONVENIENT    INSTALLATION**



# INSTALLATION FLEXIBILITY



Four screw holes reserved for easy installation no need drilling hole again

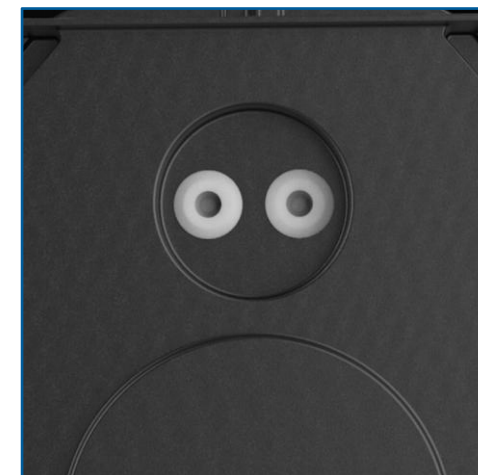

Wiring go through and out from waterproof rubber plugs on back side



Wiring from back side



Wiring from side



Alternative wiring from side, taking off screws instead by waterproof connector



Push type wire holder reserved for leading in AC cable faster





**TUPEX ROBO A PRETTY AND SMART WALL LIGHT ON THE BUILDING**