




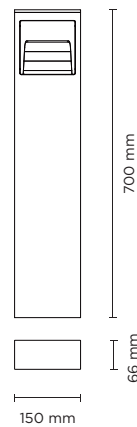

601901

## SCOUT MINI

700 mm height bollard, rectangular section, for outdoor surface installation, floor washer 180° light distribution, phospho-chromatised and polyester powder coated extruded copper-free aluminium body, frosted glass diffuser, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with 6 mid-power CREE XH-G LED. IP65 rating.



| light source                | light beam options   | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--|-------------------|------------------------|
| <b>3000°K warm-white</b>    |  |                   |                        |
| mid-power led               |  180° | 350               | 87.50                  |
| <b>4000°K neutral-white</b> |  |                   |                        |
| mid-power led               |  180° | 360               | 90.00                  |

### Finish color options:

-  Textured Grey  
RAL 9006
-  Anthracite Grey  
RAL 7016
-  Matt Black  
(on request)

### Technical features



**TUPex**electric

### Technical data

|              |  |
|--------------|--|
| Wattage      | 4 WATT   |
| IP Rating    | IP65   |
| IK Rating    | IK08   |
| Material     | High corrosion resistance extruded copper-free aluminum body |
| Coating      | Polyester powder coating with phosphochromating pre-finish   |
| Light source | NR. 6 x CREE XH-G LED  |
| Screws       | Stainless steel  |
| Transformer  | Electrical power supply 220/240V 50/60Hz built-in            |
| Gasket       | Silicone rubber  |
| Diffuser     | Tempered glass   |
| Gross weight | Kg 4,50  |










601902

## SCOUT MEDIUM

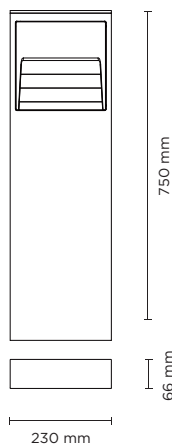750 mm height bollard, rectangular section, for outdoor surface installation, floor washer 180° light distribution, phospho-chromatised and polyester powder coated extruded copper-free aluminium body, frosted glass diffuser, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with 14 mid-power CREE XH-G LED. IP65 rating.



| light source                | light beam options   | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--|-------------------|------------------------|
| <b>3000°K warm-white</b>    |  |                   |                        |
| mid-power led               |  180° | 650               | 81.25                  |
| <b>4000°K neutral-white</b> |  |                   |                        |
| mid-power led               |  180° | 665               | 83.13                  |

### Finish color options:



### Technical features



**TUPex**electric

### Technical data

|              |  |
|--------------|--|
| Wattage      | 8 WATT   |
| IP Rating    | IP65   |
| IK Rating    | IK08   |
| Material     | High corrosion resistance extruded copper-free aluminum body |
| Coating      | Polyester powder coating with phosphochromating pre-finish   |
| Light source | NR. 14 x CREE XH-G LED                                       |
| Screws       | Stainless steel  |
| Transformer  | Electrical power supply 220/240V 50/60Hz built-in            |
| Gasket       | Silicone rubber  |
| Diffuser     | Tempered glass   |
| Gross weight | Kg 7,00  |



