



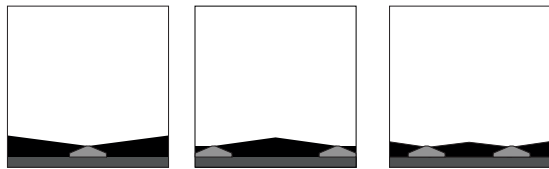

401102

## WAVE 2.0

Surface mounted luminaire for outdoor installation on window sill, with asymmetric 8°x170° “window-washer” light distribution. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with 1 x CREE XHP35 LED. IP65 rating.



170°  
SINGLE INSTALLATION,  
IN THE MIDDLE:  
SUGGESTED FOR  
SMALL / MEDIUM  
SIZE WINDOWS

170°  
DOUBLE INSTALLATION,  
ON BOTH SIDES:  
SUGGESTED IN CASE  
OF HIGH LIGHTING  
PERFORMANCE  
NEEDED

170°  
DOUBLE  
INSTALLATION,  
IN THE MIDDLE:  
SUGGESTED FOR  
BIG SIZE WINDOWS



SIDE KNOCKOUT  
FOR CABLE

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	8° x 170°	582	83.14
<b>4000°K neutral-white</b>			
high-power led	8° x 170°	600	85.71

### Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matt Black (on request)

### Technical features



### Technical data

Wattage	7 WATT
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 1 x CREE “XHP35” LED
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Diffuser	PMMA
Power cable	1 mt. power cable included
Gross weight	1,00 Kg

