




101903

NANOSPOT MINI HP

Projector for outdoor installation on a façade/wall. Body in anodized aluminum with phospho-chromatised and polyester powder coating, bracket in stainless steel, tempered safety glass, moulded silicone gasket and stainless steel screws. Constant current max 700mA remote driver needed. With 1 x CREE XHP35 LED. IP66 rating.

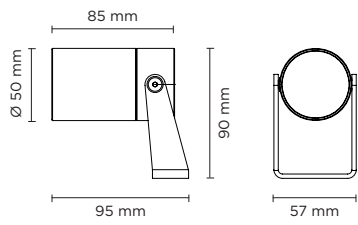

350 mA - LED POWER 5W

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--------------------|-------------------|------------------------|
| 3000°K warm-white | | | |
| high-power led | 4° | 510 | 102.00 |
| high-power led | 10° | 489 | 97.80 |
| high-power led | 28° | 474 | 94.80 |
| 4000°K neutral-white | | | |
| high-power led | 4° | 520 | 104.00 |
| high-power led | 10° | 499 | 99.80 |
| high-power led | 28° | 484 | 96.80 |

Finish color options:

- Textured Grey
RAL 9006
- Anthracite Grey
RAL 7016
- Matt Black
(on request)

Technical features

IP 66

IK 09

CE

5 YEARS

NEW

Technical data

| | |
|---------------|---|
| Wattage | MAX 10 WATT |
| IP Rating | IP66 |
| IK Rating | O9 |
| Material | Hard anodized aluminum |
| Coating | Polyester powder coating with phosphocromating pre-finish |
| Light source | 1 x CREE XHP35 LED |
| Screws | Stainless steel |
| Remote driver | Constant current max 700mA |
| Gasket | Silicone rubber |
| Glass | Tempered |
| Power cable | 1 mt. power cable included |
| Gross weight | 0,60 Kg |



500 mA - LED POWER 7W

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--------------------|-------------------|------------------------|
| 3000°K warm-white | | | |
| high-power led | 4° | 690 | 98.57 |
| high-power led | 10° | 662 | 94.57 |
| high-power led | 28° | 642 | 91.71 |
| 4000°K neutral-white | | | |
| high-power led | 4° | 703 | 100.43 |
| high-power led | 10° | 676 | 96.57 |
| high-power led | 28° | 656 | 93.71 |

700 mA - LED POWER 10W

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--------------------|-------------------|------------------------|
| 3000°K warm-white | | | |
| high-power led | 4° | 907 | 90.69 |
| high-power led | 10° | 872 | 87.20 |
| high-power led | 28° | 846 | 84.60 |
| 4000°K neutral-white | | | |
| high-power led | 4° | 930 | 93.00 |
| high-power led | 10° | 890 | 89.00 |
| high-power led | 28° | 863 | 86.30 |


ACCESSORIES

OPTIONAL

AC044
SPIKE



AC095
HONEYCOMB LOUVER



AC038
TREE STRAP



AC098
ANTI-GLARE SNOOT



AC100 PIPE L 300 mm

Extension pipe length 300 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.

AC101 PIPE L 600 mm

Extension pipe length 600 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.

AC102 PIPE L 900 mm

Extension pipe length 900 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.



remote driver selection

| brand | manufacturer code | type | watt | IP rate | numbers of fixtures |
|-------------|-------------------|------------------------|------|---------|---------------------|
| ALVIT Italy | AL1435S-IP | Constant current 350mA | 14W | IP67 | min 1 - max 2 |
| ALVIT Italy | AL1450S-IP | Constant current 500mA | 14W | IP67 | 1 |
| ALVIT Italy | AL1470S-IP | Constant current 700mA | 14W | IP67 | 1 |
| TCI Italy | 152014/350 | Constant current 350mA | 17W | IP68 | min 1 - max 3 |
| TCI Italy | 152014/500 | Constant current 500mA | 24W | IP68 | min 1 - max 3 |
| TCI Italy | 152014/700 | Constant current 700mA | 30W | IP68 | min 1 - max 3 |



