


TERRA MEDIUM



Technical features




Technical data

| | |
|-------------|--|
| IP Rating | IP67 |
| IK Rating | 10 |
| Material | High corrosion resistance die-cast copper-free aluminum body |
| Trim | Stainless steel AISI 316 |
| Coating | Polyester powder coating with phosphochromating pre-finish |
| Screws | Stainless steel |
| Gasket | Silicone rubber |
| Glass | Tempered |
| Power cable | 1 mt. power cable included |



EXTERNAL TRIM REALIZED IN STAINLESS STEEL AISI 316L

NO VISIBLE SCREWS ONCE THE PRODUCT IS INSTALLED



17,5 mm

REDUCED WIDTH AT 17,5 MM FOR BETTER AESTHETIC IMPACT



SPECIAL TILT SYSTEM INTEGRATED ALLOWING ON SITE ADJUSTMENT +/- 20 DEG. WITHOUT OPENING THE LUMINAIRE



LIGHT BEAM OPTIONS



EXTRA NARROW 4°

VERY NARROW 10°

NARROW SPOT 18°

MEDIUM 28°

MEDIUM WIDE 35°

WIDE FLOOD 55°

ASYMMETRIC WALL-WASHER



207012

TERRA MEDIUM HP

Diameter 205mm ground-recessed luminaire for outdoor installation, phosphochromatised and polyester powder coated die-cast copper-free aluminium body and stainless steel AISI 316L frame, tempered safety glass, moulded silicone gasket. Light source tilt system +/- 15deg from outside. Built-in LED driver, with 3 x CREE "XHP35" LED. IP67 rating.

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--------------------|-------------------|------------------------|
| 2700°K warm-white | | | |
| high-power led | 4° | 1.809 | 90.45 |
| high-power led | 10° | 1.733 | 86.65 |
| high-power led | 28° | 1.679 | 83.95 |
| 3000°K warm-white | | | |
| high-power led | 4° | 1.863 | 93.15 |
| high-power led | 10° | 1.787 | 89.35 |
| high-power led | 28° | 1.733 | 86.65 |
| 4000°K neutral-white | | | |
| high-power led | 4° | 1.898 | 94.90 |
| high-power led | 10° | 1.825 | 91.25 |
| high-power led | 28° | 1.771 | 88.55 |

Finish color options:

Stainless Steel

ACCESSORIES




AC118
HONEYCOMB LOUVER
FOR TERRA MEDIUM

Technical features



Available on request

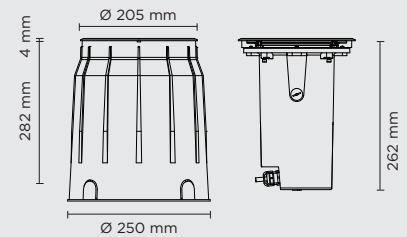

Technical data

| | |
|--------------|---|
| Wattage | 20 WATT |
| IP Rating | IP67 |
| IK Rating | IK10 |
| Material | high corrosion resistance die-cast copper-free aluminum |
| Trim | Stainless steel AISI 316L |
| Coating | polyester powder coating with phosphochromating pre-finish |
| Light Source | Nr. 3 CREE XHP35 LED |
| Screws | Stainless steel |
| Transformer | Electrical power supply 220/240V 50/60Hz built in |
| Gasket | Silicone rubber |
| Glass | Tempered |
| Cable gland | M20 |
| Power cable | 1 mt. neoprene power cable included |
| Gross weight | 5,00 Kg |

