




701103

QUBO MEDIUM COB DOWNLIGHT

Surface mounted luminaire for outdoor ceiling installation. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium base and head, tempered safety glass, moulded silicone gaskets, with screws in stainless steel. Built-in LED driver, with 1 COB CREE "CXB 1512" LED. IP66 rating.

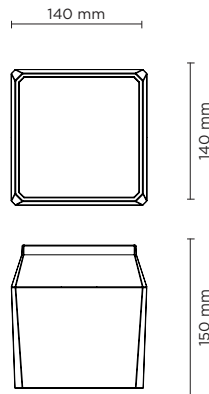

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--------------------|-------------------|------------------------|
| 3000°K warm-white | | | |
| cob led | 14° | 1.900 | 118.75 |
| cob led | 35° | 1.813 | 113.31 |
| cob led | 55° | 1.722 | 107.62 |
| 4000°K neutral-white | | | |
| cob led | 14° | 2.000 | 125.00 |
| cob led | 35° | 1.900 | 118.75 |
| cob led | 55° | 1.805 | 112.81 |


Finish color options:

Textured Grey
RAL 9006

Anthracite Grey
RAL 7016

Matt Black
(on request)

Technical features

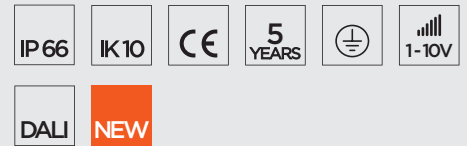

Technical data

| | |
|--------------|--|
| Wattage | 16 WATT |
| IP Rating | IP66 |
| IK Rating | IK10 |
| Material | High corrosion resistance die-cast copper-free aluminum body |
| Coating | Polyester powder coating with phosphochromating pre-finish |
| Light source | 1 x COB CREE "CXB 1512" LED |
| Screws | Stainless steel |
| Transformer | Electrical power supply 220/240V 50/60Hz built-in |
| Gasket | Silicone rubber |
| Glass | Tempered |
| Power cable | 1 mt. power cable included |
| Gross weight | 3,10 Kg |

AC073
HONEYCOMB LOUVER

