


701206

CYLINDER MEDIUM HP

Surface mounted luminaire for outdoor ceiling installation. Phospho-chromatised and polyester powder coated extruded copper-free aluminium body, tempered safety glass, moulded silicone gaskets, with screws in stainless steel. Built-in LED driver, with 3 x CREE "XHP35" LED. IP66 rating.

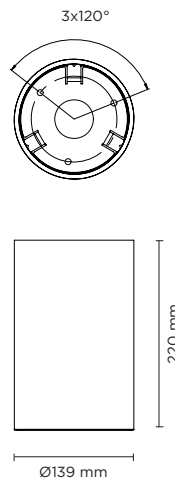

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--------------------|-------------------|------------------------|
| 3000°K warm-white | | | |
| high-power led | 4° | 2.050 | 102.50 |
| high-power led | 10° | 2.000 | 100.00 |
| high-power led | 28° | 1.950 | 97.50 |
| 4000°K neutral-white | | | |
| high-power led | 4° | 2.100 | 105.00 |
| high-power led | 10° | 2.050 | 102.50 |
| high-power led | 28° | 2.000 | 100.00 |

Finish color options:

 Textured Grey
RAL 9006

 Anthracite Grey
RAL 7016

 Matt Black
(on request)

Technical features



Technical data

| | |
|--------------|--|
| Wattage | 20 WATT |
| IP Rating | IP66 |
| IK Rating | IK09 |
| Material | Phospho-chromatised and polyester powder coated extruded copper-free aluminium |
| Coating | Polyester powder coating with phosphochromating pre-finish |
| Light source | 3 x CREE "XHP35" LED |
| Screws | Stainless steel |
| Transformer | Electrical power supply 220/240V 50/60Hz built-in |
| Gasket | Silicone rubber |
| Glass | Tempered |
| Power cable | 1 mt. power cable included |
| Gross weight | 4,00 Kg |

AC092
HONEYCOMB LOUVER

