



701310

CIELO MEDIUM WALL-WASHER

Diameter 219mm ceiling-recessed luminaire for outdoor installation, phosphochromatised and polyester powder coated die-cast copper-free aluminium body and stainless steel AISI 316L frame, tempered safety glass, moulded silicone gasket. Built-in LED driver 220-240V 50-60Hz, with 32 x mid-power SAMSUNG 2835 LED. IP67 rating.

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--------------------|-------------------|------------------------|
| 2700°K warm-white | | | |
| mid-power led | WALL-WASHER | 900 | 69.23 |
| 3000°K warm-white | | | |
| mid-power led | WALL-WASHER | 940 | 72.31 |
| 4000°K neutral-white | | | |
| mid-power led | WALL-WASHER | 980 | 75.38 |


Finish color options:

 Stainless Steel

Technical features



Available on request

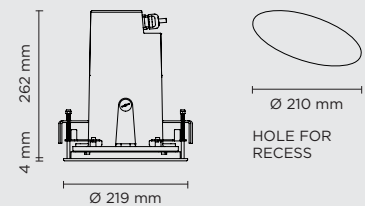

Technical data

| | |
|--------------|--|
| Wattage | 13 WATT |
| IP Rating | IP67 |
| IK Rating | IK10 |
| Material | high corrosion resistance die-cast copper-free aluminum |
| Trim | Stainless steel AISI 316L |
| Coating | polyester powder coating with phosphochromating pre-finish |
| Light Source | Nr. 32 x mid-power SAMSUNG 2835 LED |
| Screws | Stainless steel |
| Transformer | Electrical power supply 220/240V 50/60Hz built-in |
| Gasket | Silicone rubber |
| Glass | Tempered |
| Cable gland | M20 |
| Power cable | 1 mt. neoprene power cable included |
| Gross weight | 4,70 Kg |

