




206003

HYDROFLOOR MAXI INVISA

ALL BLACK APPEARANCE.

Round compact ground-recessed luminaire for outdoor installation, Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body and stainless steel AISI 304 frame, tempered safety glass, moulded silicone gasket, non-visible stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with 16 CREE XP-G2 LED + special optics with "invisa-light" technology. IP67 rating.

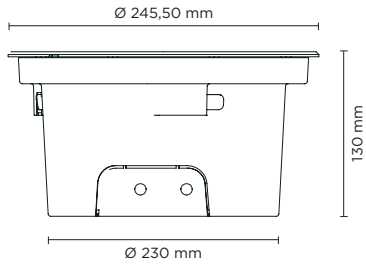

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--------------------|-------------------|------------------------|
| 3000°K warm-white | | | |
| high-power led | 15° | 2.232 | 82.67 |
| high-power led | 35° | 2.120 | 78.52 |
| high-power led | 55° | 2.014 | 74.59 |
| 4000°K neutral-white | | | |
| high-power led | 15° | 2.325 | 86.11 |
| high-power led | 35° | 2.208 | 81.78 |
| high-power led | 55° | 2.098 | 77.69 |

Finish color options:

- Matt Black
- Stainless Steel (on request)

Technical features

IP67

IK10

CE

5 YEARS

⚡

5000

1-10V


DALI

NO

+/-15°

Technical data

| | |
|--------------------------|--|
| Wattage | 27 WATT |
| IP Rating | IP67 |
| IK Rating | IK10 |
| Material | High corrosion resistance die-cast copper-free aluminum body |
| Coating | Polyester powder coating with phosphochromating pre-finish |
| Trim | Stainless steel AISI 304 |
| Light source | NR. 16 x 1.5W CREE "XP-G2" LED |
| Transformer | Electronic power supply 220/240V 50/60Hz built-in |
| Screws | Stainless steel |
| Optics | Special optics with "invisa-light" technology |
| Gasket | Silicone rubber |
| Glass | Tempered |
| Cable | Double M20 cable gland |
| Static weight resistance | Max 5000 Kg |
| Power cable | 1 mt. neoprene power cable included |
| Gross weight | 4,50 Kg |
| Included | Polypropilene housing for recess included |

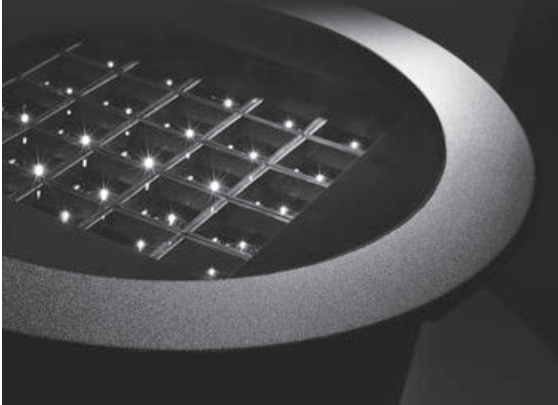

Stainless steel finish trim available on request

Sliding hooking system for recessing box

