

402701-02-03-04

GRAZER

Linear wall mounted luminaire for outdoor installation for façade/wall grazing, length 500 mm or 1.000mm.

Anodized extruded copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws.

Remote 24V DC driver needed, with 9 to 36 CREE LED.

IP66 rating.





Technical features




Technical data

| | |
|---------------|---|
| IP Rating | IP66 |
| IK Rating | IK08 |
| Material | Extruded aluminum |
| Remote driver | Constant voltage 24V DC |
| Gasket | Silicone rubber |
| Glass | Tempered |
| Power cable: | Input and output power cable for loop-in/loop-out installation, supplied with male and female connector |

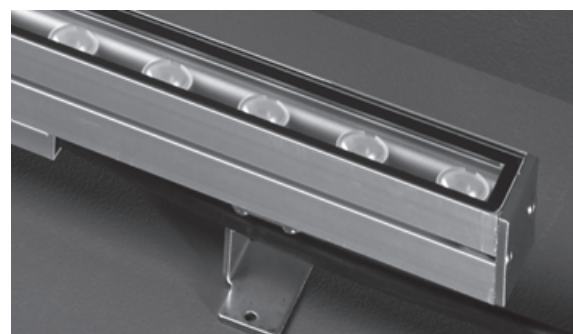


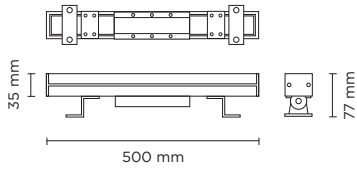


| 402701 | | GRAZER-9 500 |
|-----------------------------|--|-------------------|
| light source | light beam options | lumen output (lm) |
| 3000°K warm-white | | |
| high-power led | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 700 |
| 4000°K neutral-white | | |
| high-power led | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 720 |

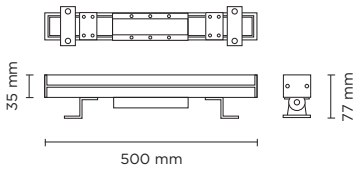

| 402702 | | GRAZER-18 500 |
|-----------------------------|--|-------------------|
| light source | light beam options | lumen output (lm) |
| 3000°K warm-white | | |
| high-power led | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 1.400 |
| 4000°K neutral-white | | |
| high-power led | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 1.440 |

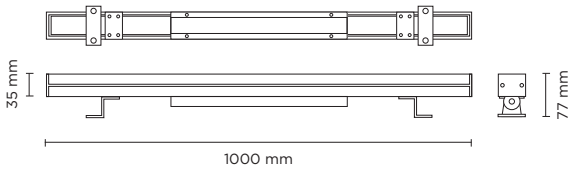


| 402703 | | GRAZER-18 1000 |
|-----------------------------|--|-------------------|
| light source | light beam options | lumen output (lm) |
| 3000°K warm-white | | |
| high-power led | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 1.400 |
| 4000°K neutral-white | | |
| high-power led | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 1.440 |

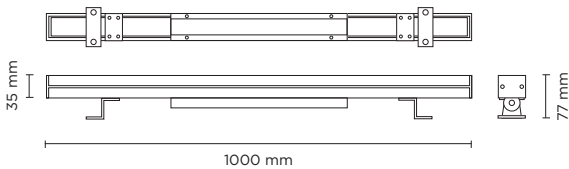

| 402704 | | GRAZER-36 1000 |
|-----------------------------|--|-------------------|
| light source | light beam options | lumen output (lm) |
| 3000°K warm-white | | |
| high-power led | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 2.820 |
| 4000°K neutral-white | | |
| high-power led | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 2.880 |


Technical data

| | |
|--------------|----------------|
| Wattage | 9 WATT |
| Voltage | 24V DC |
| Length | 500 mm |
| Light source | Nr. 9 CREE LED |
| Gross weight | 2,00 Kg |

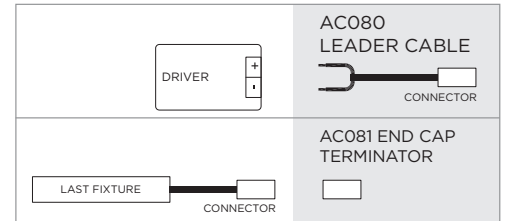


Technical data

| | |
|--------------|-----------------|
| Wattage | 18 WATT |
| Voltage | 24V DC |
| Length | 500 mm |
| Light source | Nr. 18 CREE LED |
| Gross weight | 2,00 Kg |

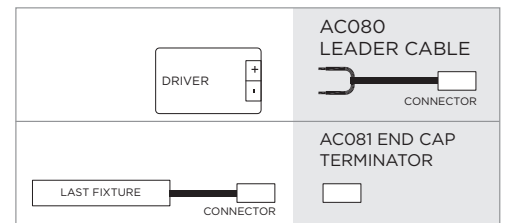

Technical data

| | |
|--------------|-----------------|
| Wattage | 18 WATT |
| Voltage | 24V DC |
| Length | 1.000 mm |
| Light source | Nr. 18 CREE LED |
| Gross weight | 3,00 Kg |

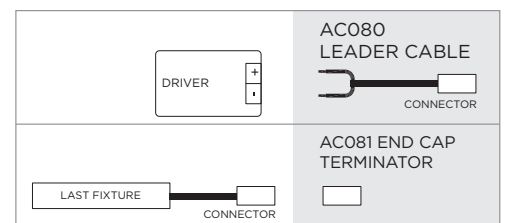

Technical data

| | |
|--------------|-----------------|
| Wattage | 36 WATT |
| Voltage | 24V DC |
| Length | 1.000 mm |
| Light source | Nr. 36 CREE LED |
| Gross weight | 3,00 Kg |