



602301


COINY BOLLARD

Designed by
NAVA + AROSIO

Projector for outdoor installation on a façade/ wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium, tempered safety glass, moulded silicone gasket and stainless steel screws. With 1 direct 220-240V LUMENS "EDC 38C" COB LED. IP66 rating.



MAX NR. 2 FIXTURES PER PIPE

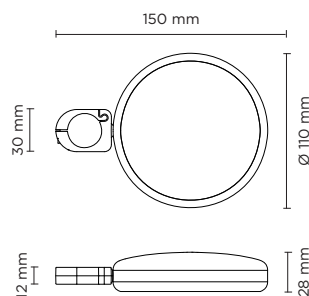

Technical features

IP66

IK08

CE

5 YEARS



NEW

Technical data

Wattage	8 WATT
IP Rating	IP66
IK Rating	O8
Material	High corrosion resistance die-cast copper-free aluminium body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x LUMENS "EDC 38C" COB LED
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. power cable included
Gross weight	1,20 Kg

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
cob led	18°	400	50.00
cob led	36°	390	48.75
cob led	60°	375	46.88
4000°K neutral-white			
cob led	18°	410	51.25
cob led	36°	400	50.00
cob led	60°	385	48.13

Finish color options:

Textured Grey
RAL 9006

Anthracite Grey
RAL 7016

Matt Black
(on request)





AC112

PIPE L 500 mm + BASE


Extension pipe length 500 mm made in anodized aluminum with phospho-chromatised and polyester powder coating; complete with fixing base.



AC113

PIPE L 1000 mm + BASE

Extension pipe length 1.000 mm made in anodized aluminum with phospho-chromatised and polyester powder coating; complete with fixing base.

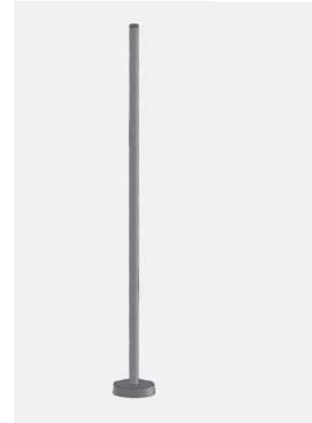

OPTIONAL

AC044
SPIKE



AC111
VISOR



AC0110
HONEYCOMB LOUVER

