




806001 - 806002

## SINGLE ZEUS POLE 36-48

Square pole mounted floodlight for outdoor installation on a pole diam. 60 mm or 76 mm. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. Flange for pole diam. 60 mm or 76 mm included. Built-in LED driver 220-240V 50-60Hz, with 36 or 48 CREE XP-G2 LED. IP66 rating.



### Technical features



### Technical data





IP Rating	IP66
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	M16 rubber grommet
Power cable	Not included
Weight	Kg 5,50

CYCLE ROUTE / PEDESTRIAN








STREET




806001		<b>SINGLE ZEUS POLE 36</b> 56 WATT 220-240V 50-60HZ		
light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>3000°K warm-white</b>				
high power led	 cycle route pedestrian	4.888	87.28	
high power led	 street	4.888	87.28	
<b>4000°K neutral-white</b>				
high power led	 cycle route pedestrian	5.040	90.00	
high power led	 street	5.040	90.00	

\* Other light colors available on request: Neutral-white



806002		<b>SINGLE ZEUS POLE 48</b> 75 WATT 220-240V 50-60HZ		
light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
<b>3000°K warm-white</b>				
high power led	 cycle route pedestrian	6.474	86.33	
high power led	 street	6.474	86.33	
<b>4000°K neutral-white</b>				
high power led	 cycle route pedestrian	6.675	89.00	
high power led	 street	6.675	89.00	


\* Other light colors available on request: Neutral-white



#### Colors options


-  Textured Grey RAL 9006
-  Anthracite Grey RAL 7016
-  Matt Black (on request)

## POLES & ACCESSORIES

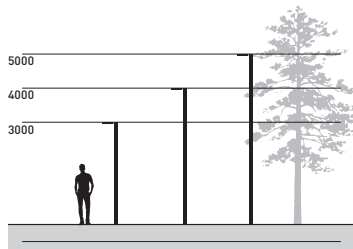

#### BURIED POLES

code	article	h. mm.	description
809901	cylindrical pole 3,5 meters to be buried	3.500	Cylindrical pole made in steel S235JR (UNI EN 10219) hot galvanized (UNI EN 1461), diameter 76 mm, thickness 4 mm.
809902	cylindrical pole 4,5 meters to be buried	4.500	Phospho-chromatised and polyester powder coated. Total height including 500 mm to be buried into the ground. Includes IP54 cover plate 132x38 mm and terminal block in double insulation.
809903	cylindrical pole 5,5 meters to be buried	5.500	
809909	Top cap for pole diam. 76 mm.		



#### POLES WITH BASE-PLATE

code	article	h. mm.	description
809904	cylindrical pole 3 meters with base-plate	3.000	Cylindrical pole made in steel S235JR (UNI EN 10219) hot galvanized (UNI EN 1461), diameter 76 mm, thickness 4 mm.
809905	cylindrical pole 4 meters with base-plate	4.000	Phospho-chromatised and polyester powder coated. With base plate dim. 250x250 mm, thickness 10 mm Includes IP54 cover plate 132x38 mm and terminal block in double insulation.
809906	cylindrical pole 5 meters with base-plate	5.000	
809907	anchorage unit for base-plate		Base plate dim. 250x250 mm, thickness 3 mm, made in galvanized steel complete of nr. 4 anchorage threaded bolts
809909	Top cap for pole diam. 76 mm.		

