






### TUPEX SCATO LED

WL88 Series





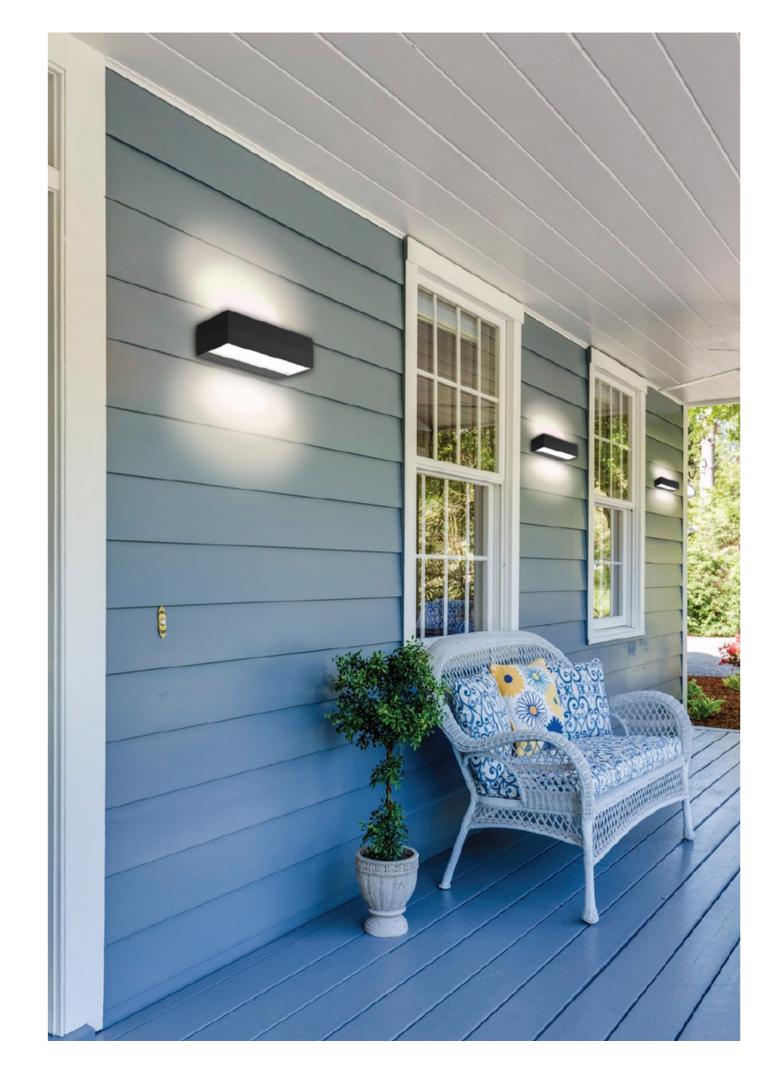













# Introduction


This wall lamp is a direct&indirect,direct/indirect lighting design, the lamp body is made of aluminum diecasting, which has good heat dissipation, the lamp surface is sprayed with outdoor sand grain powder, which is corrosion resistant. Besides, it adopts SMD light source, so that can do CCT adjustable version. Strong structure design, IP65 waterproof will suit to a wider application area.

### **Features**

- Direct&indirect,direct/indirect lighting design.
- IP65 waterproof.
- Special reflector makes it a better wall washer effect.
  Interchangeable CCT(3000K+4000K+5700K)with slide switch.
  Loop in/loop out wire entry design.
  Internal flicker free driver.


# **Application Areas**

It is designed for indoor and outdoor lighting applications hotel, park, and corridors etc.

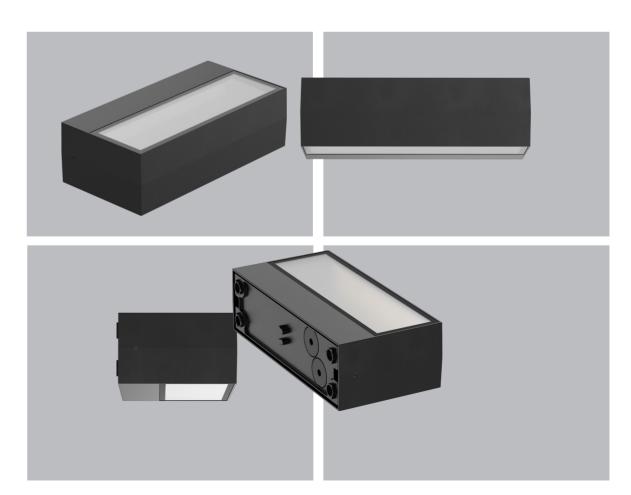

### Driver Datasheet (Triac Dimmable)

	Total load wattage	10W	15W
Output	Output Voltage range	DC65-75V	
	Rated output current	120mA	180mA
	Line Regulation	±5%	
	Setup, Rise Time	≤0.5S	
	Flickering Index	<5%(LOW RISK)	
Input	Input Voltage	200-240V	
	Rated Input Voltage(V)	230V	
	Frequency	50Hz	
	Input Current	≤0.06A	≤0.09A
	Rated Input Current	≤0.05A	≤0.08A
	Power Factor	0.85	0.9
	THD	-	
	Efficiency	≥81%	≥83%
	No load wattage	≤1W	
Protection	Short circuit protection	PASS	
	Over voltage protection	PASS	
	Over temperature protection	PASS	
Safety &EMC	Withstand voltage	-	
	Isolation Resistance	-	
	Surge	IEC/EN61000-4-5( P<25W; L-N:500V, L/N-PE:1KV)	
	EMC Emission	EN55015, EN61000-3-2	
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11; EN61547	

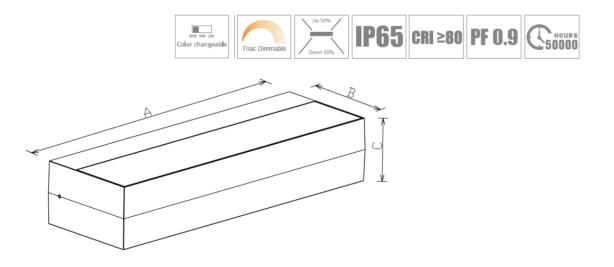

#### **Installation Instruction**

## **WARNING**

- 1.Switch off before installation.
- 2.Switch on only after complete installation and examination of the circuit.3.Professional electrician for installation and maintenance only.



### **■** Wall mounted installation

